


GEOLOGIC MAP OF BOONE AND WINNEBAGO COUNTIES IN ILLINOIS

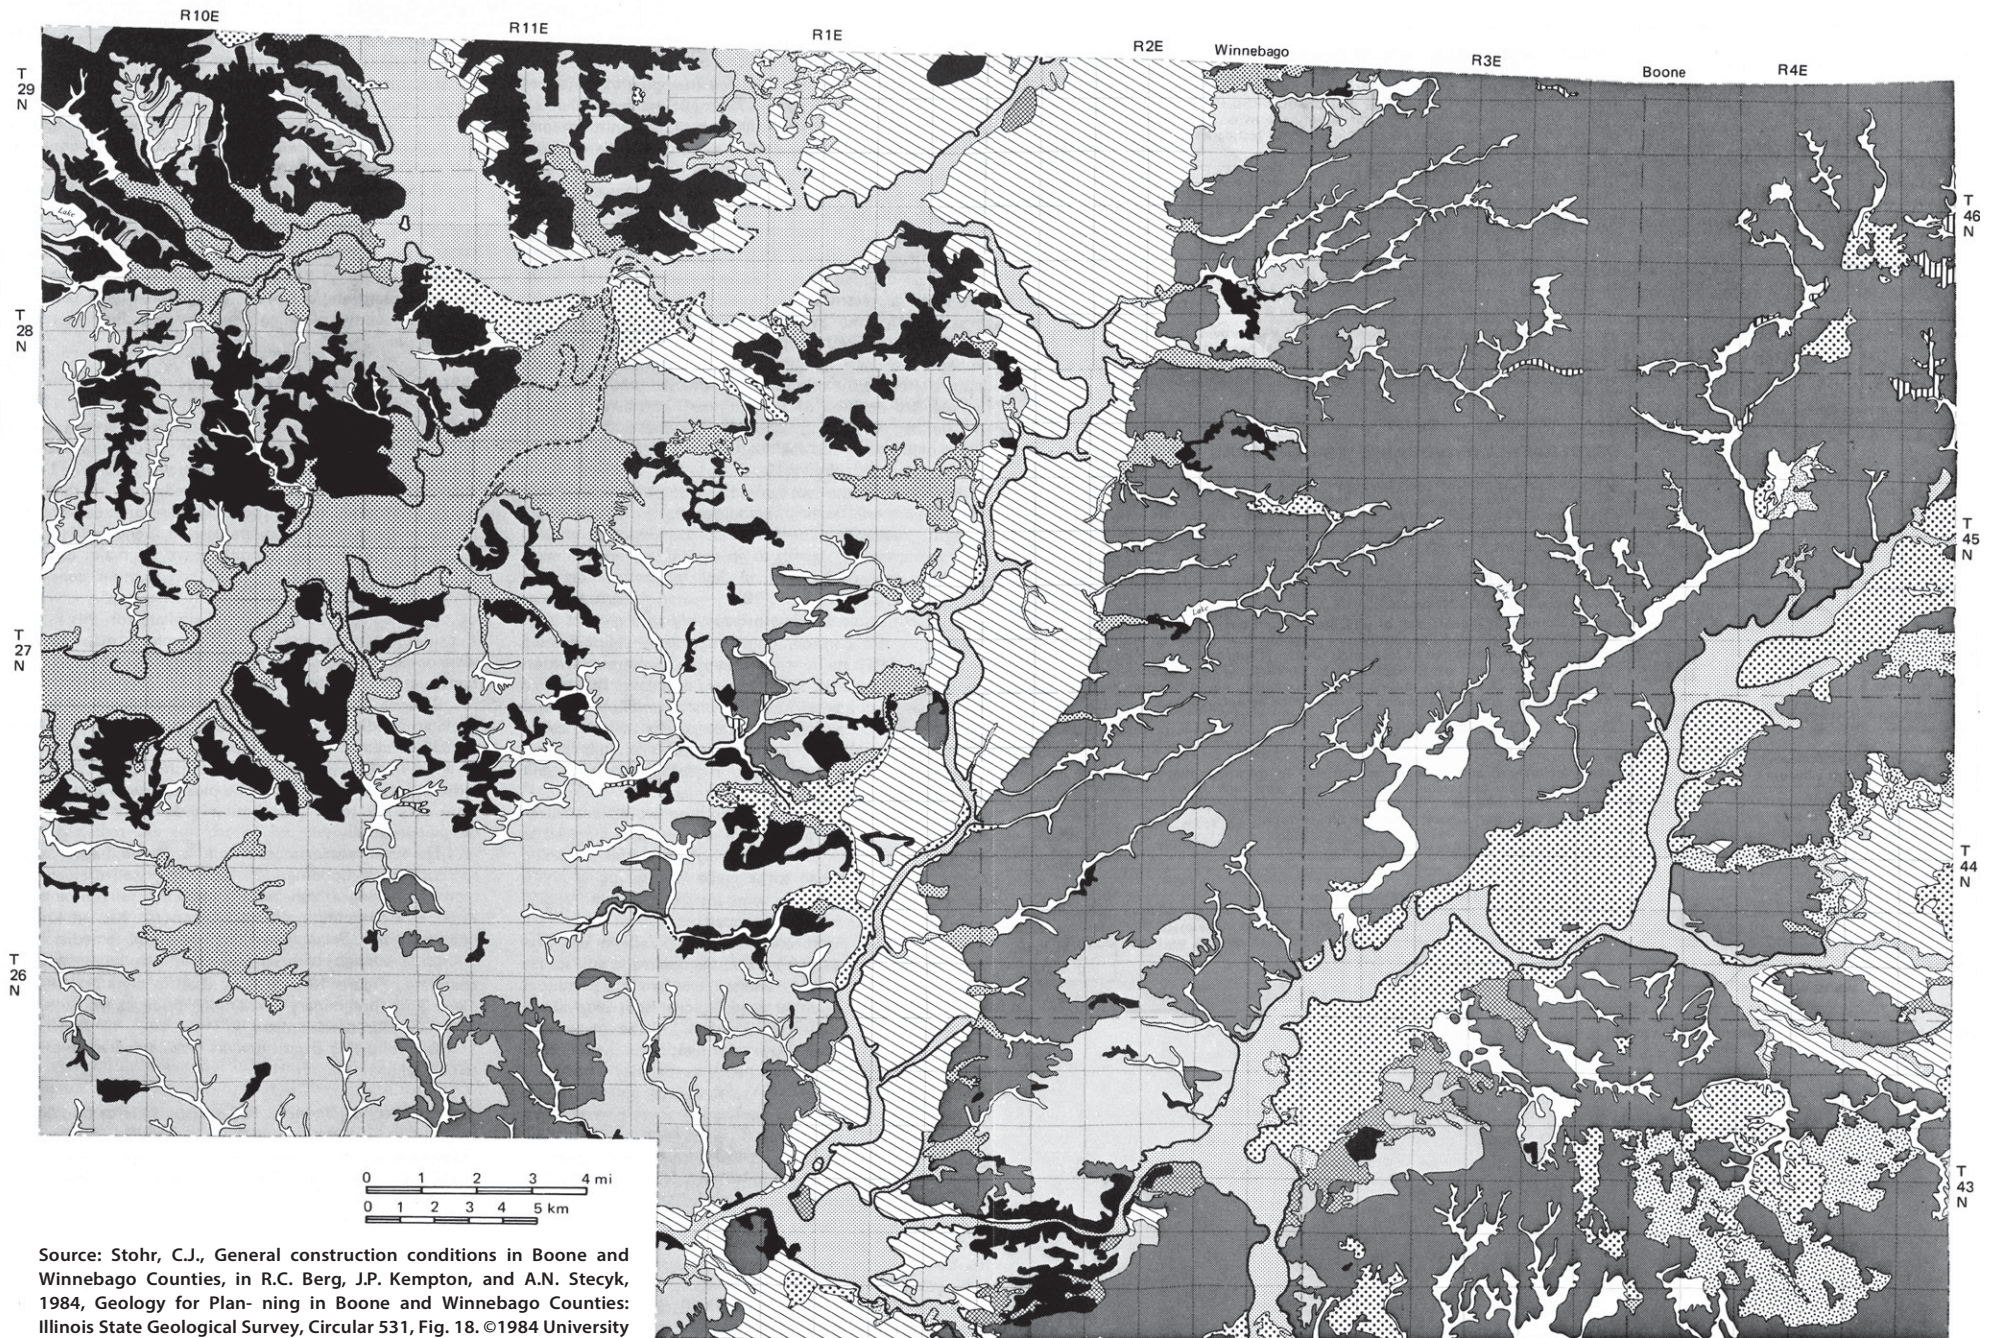


Source: Stohr, C.J., General construction conditions in Boone and Winnebago Counties, in R.C. Berg, J.P. Kempton, and A.N. Stecyk, 1984, Geology for Planning in Boone and Winnebago Counties: Illinois State Geological Survey, Circular 531, Fig. 18. ©1984 University of Illinois Board of Trustees. Used with permission of the Illinois State Geological Survey.

MOST FAVORABLE FOR GENERAL CONSTRUCTION

This category has units with well-drained profiles, moderate and high bearing capacities; can be excavated by light or heavy equipment; bedrock does not generally occur within 20 ft. Unit lies outside the 100-year floodline. Few or no geologic hazards are known. These units normally require less exploration on testing and foundation preparation for most small construction projects.


LOCATIONS: Major river valleys and terrace outwash plains of Rock and lower Pecatonica valleys

Unit is above the 100-year flood plain and will provide medium bearing capacity on well-drained, highly permeable materials of low frost susceptibility and low potential volume change. Materials of the unit have moderate erosion potential and are easily excavated, but slopes may be unstable.



LOCATIONS: Major river valleys and adjacent slopes

Unit is above the 100-year floodplain, and will provide medium bearing capacity. Materials are well-drained, have high-to-moderate permeability, low frost susceptibility, and probably low potential volume change. Materials of the unit are moderately susceptible to erosion and are easily excavated; however, slopes may be unstable.




MODERATELY FAVORABLE FOR GENERAL CONSTRUCTION

This category is characterized by moderate drainage in upper profile, poor drainage in lower profile, and moderate-to-high bearing capacities for outwash and till respectively. These materials typically can be excavated with heavy equipment with some difficulty. Ripping or blasting will probably be required for deep bedrock excavations. Low-lying areas are subject to flooding. Bedrock surface can be uneven adjacent to large streams and buried preglacial valleys. Karst features (such as sinkholes, caves, open joints) can be encountered in bedrock. Foundation exploration and/or testing is recommended; some foundation preparation may be necessary.


LOCATIONS: Lower Kishwaukee Valley and slopes

Less consolidated (upper) part of unit has medium bearing capacity, high-to-moderate permeability, high frost susceptibility, probably low potential volume change; not susceptible to flooding except near small streams. These materials are moderately susceptible to erosion, and easily excavated to bedrock. Slopes cut into outwash may be unstable. Bedrock has high bearing capacity but will impede downward water drainage; this may cause temporary ponding of water at the bedrock contact.



LOCATIONS: Uplands, slopes, and upland streams, particularly in Boone and western Winnebago County

Loess, colluvium, and alluvium are variable in thickness, have low bearing capacity, moderate-to-low permeability and drainage, and high frost susceptibility. Till and bedrock have a medium-to-high bearing capacity, but impede downward water drainage. Water will temporarily pond above the till and rock.



LOCATIONS: Uplands, slopes, and upland streams particularly in eastern Winnebago County

Loess, dune sand, colluvium, and alluvium vary in thickness, have low-to-medium bearing capacity and high frost susceptibility. Till has medium-to-high bearing capacity and impedes downward water drainage. More than one till unit may occur at a site.





Diagram labels: **c:** Cahokia Alluvium; **ec:** Carmi Member of Equality Formation; **g:** Glasford Formation; **gl:** Grayslake Peat; **hm:** Mackinaw Member of Henry Formation; **hw:** Wasco Member of Henry Formation; **Og:** Ordovician dolomite of Galena and Platteville Groups; **pl:** Parkland Sand; **ppr:** Peyton Colluvium, Peoria Loess, and Roxana Silt; **pr:** Peoria Loess and Roxana Silt; **py:** Peyton Colluvium; **wi:** Winnebago Formation

LEAST FAVORABLE FOR GENERAL CONSTRUCTION

Category is characterized by poorly drained profile with variable to low bearing capacity and variable excavation characteristics; subject to periodic flooding, flash flooding, or ponding of rainwater. Other geologic hazards include: compressible organic material, lacustrine silts and clays, and fluctuating groundwater levels potentially creating confined artesian conditions in some areas. Foundation exploration and testing are recommended. Foundation preparation may be extensive.


LOCATIONS: Uplands and slopes of the Pecatonica and Sugar River valleys and tributaries

Thin surficial materials have moderate drainage and bearing capacity and high frost susceptibility. Bedrock has high bearing capacity, but can impede downward water drainage, causing rapid runoff.




LOCATIONS: Upland Creeks and streams

Poorly drained alluvium has variable bearing capacity and thickness, probably subject to occasional flooding. Till and bedrock have high bearing capacities but may have irregular surfaces.




LOCATIONS: Rock, Kishwaukee, Pecatonica, and Sugar River valleys

Poorly drained alluvium with extremely variable bearing capacity lies over dense gravel and sand outwash. Area is within the 100-year flood boundaries. Local dune sand can occur over outwash.




LOCATIONS: Pecatonica River valley and Rock River tributaries

Moderately drained loess, dune sand, and colluvium or poorly drained peat and muck lie over very poorly drained lacustrine silt and clay. These materials generally have low or variable bearing capacity, variable frost susceptibility, and very low permeability, and are subject to settlement and periodic flooding.

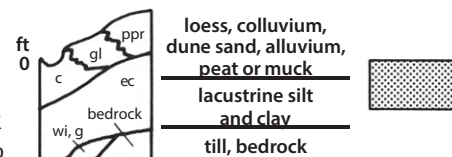


LOCATIONS: Isolated occurrence in the bottom of upland streams

High compressible, frost susceptible, poorly drained organic materials lie over till. Subject to periodic flooding.



LOCATIONS: Isolated occurrences in Kishwaukee River valley

Compressible, frost susceptible, poorly drained peat and muck lie over well-drained, non-compressible sand and gravel.



LOCATIONS: Upland plain in southeast Boone County

Lacustrine deposits of multiple layered, compressible, frost susceptible silts and clays lie over well-drained outwash. Subject to periodic flooding. Potential exists for artesian conditions to develop in confined outwash aquifer. Thorough foundation exploration is recommended.

